



1.

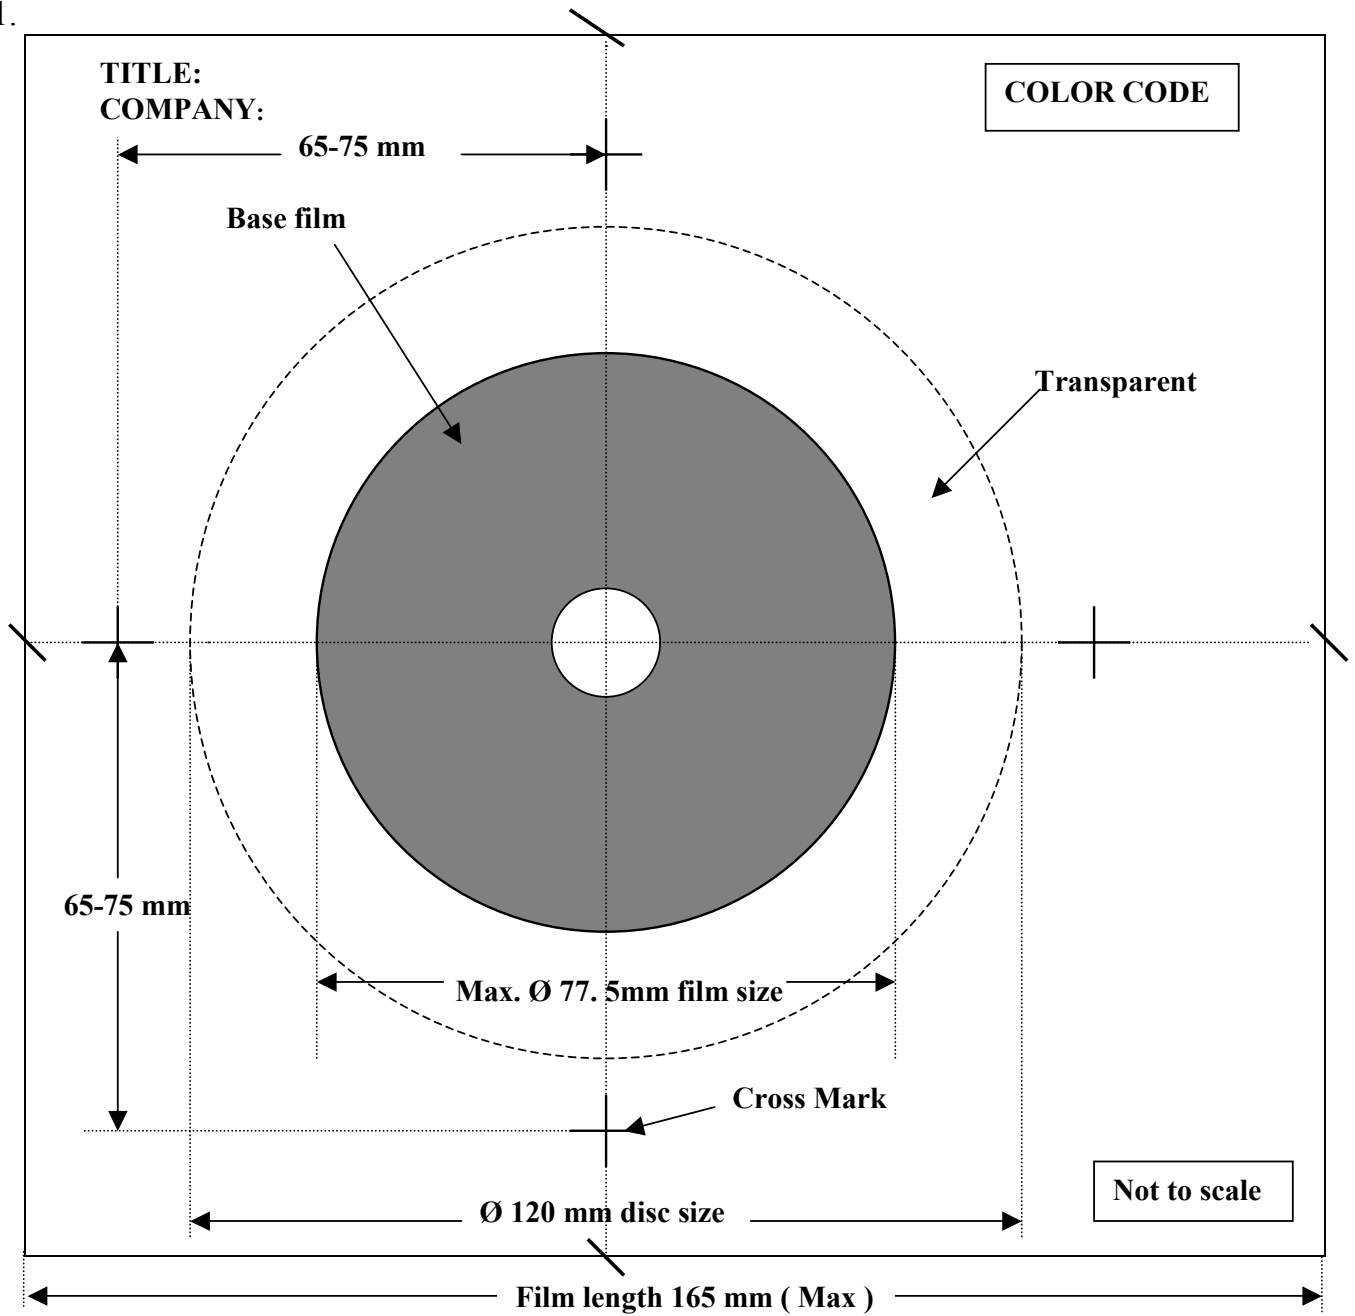

**2. CRITERIA: BASE FILM (Ø80mm DISC/ Ø77mm METALISED)**

S/No.	ITEM	SILKSCREEN	OFFSET (Not Applicable for CDR)
1.	Base Film	Positive. Emulsion up	
2.	Color Code	Indicate on film (See Above)	
3.	Color-Proof	Require	
4.	Cross Mark	Same location for all film (Line width 0.1mm & Length 5mm)	
5.	Print Area For Ø 80mm disc	2 Choices * From Ø 18.5 - 77.5 mm (max) * From Ø 35.5 - 77.5 mm (max)	

3.

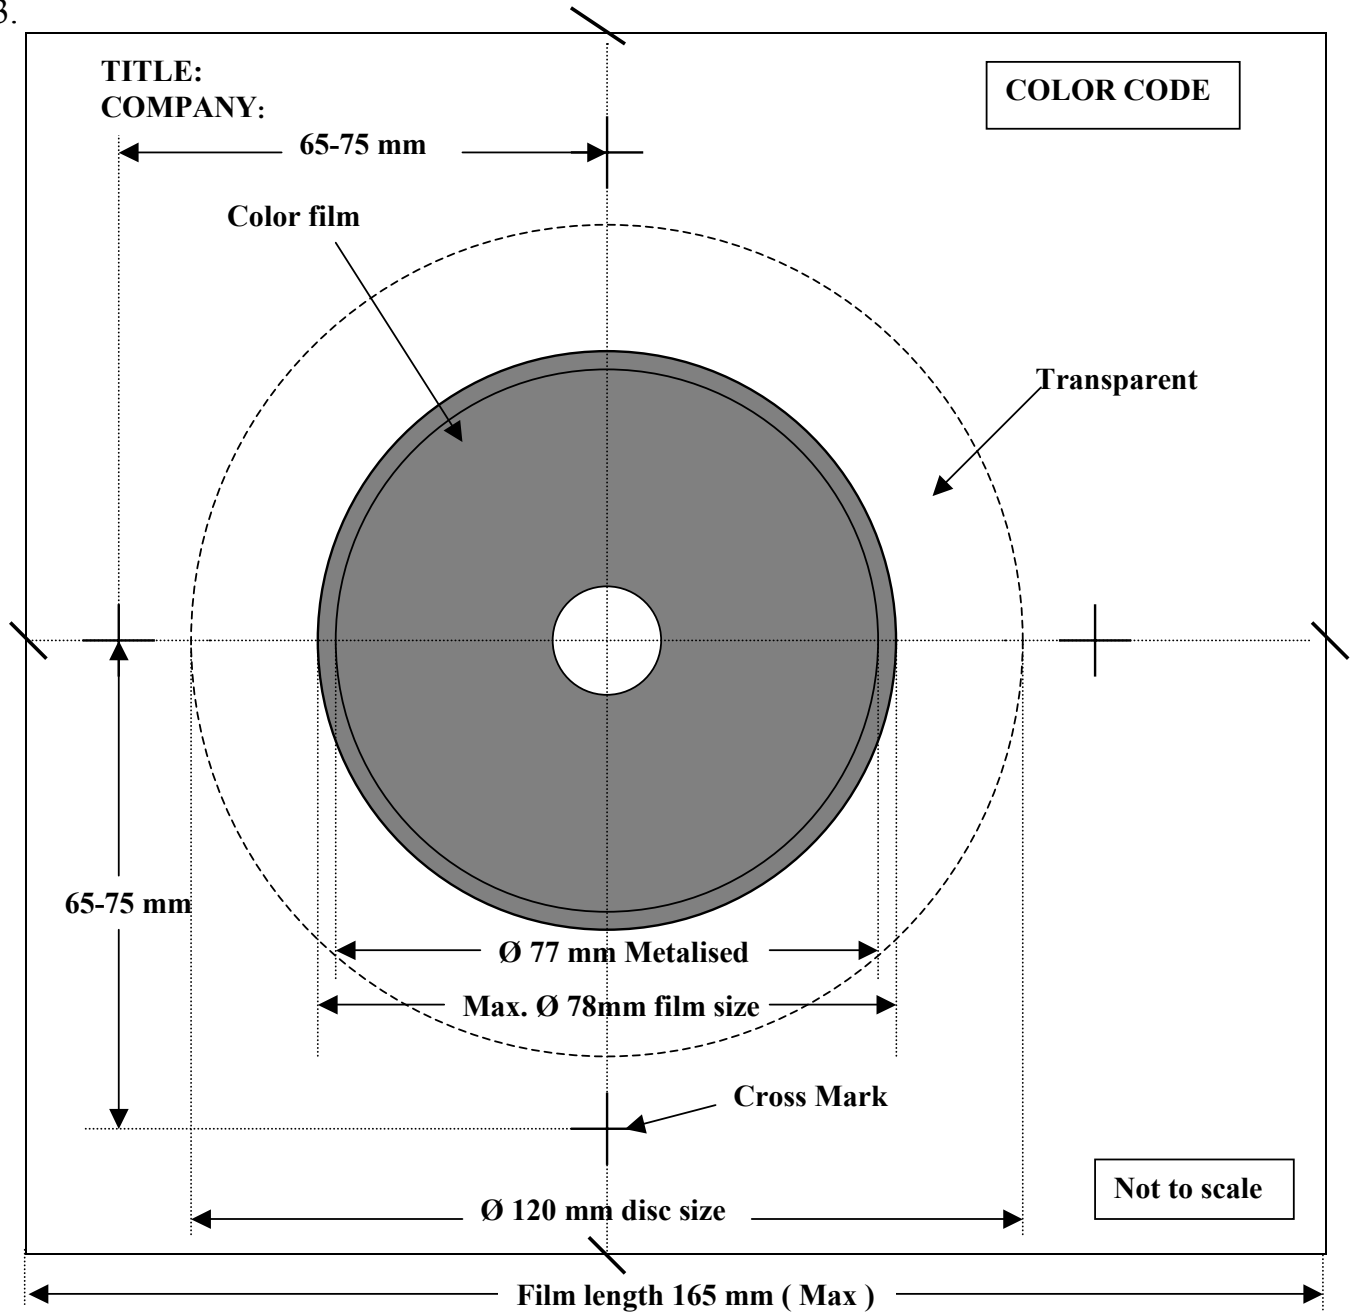

**4. CRITERIA: COLOR FILM (Ø80mm DISC/ Ø77mm METALISED)**

S/No.	ITEM	SILKSCREEN	OFFSET (Not Applicable for CDR)
1.	Half-Tone	(Max. 100 lines/ inch) (Tonal range: 15% - 85%)	(Max. 150 lines/ inch) (Tonal range: 15% - 85%)
2.	Color Film	Positive. Emulsion up	Negative. Emulsion down
3.	Lettering/ Min. requirement	Line rules 0.15mm/ Dots size 0.15mm/ Type size 1.5mm/ Spacing 0.3mm	
4.	Color Code	Indicate on film (See Above)	
5.	Color-Proof	Require	
6.	Art Work Dot Grain Size	Equivalent to that of film	
7.	Cross Mark	Same location for all film (Line width 0.1mm & Length 5mm)	
8.	Print Area For Ø 80mm disc	2 Choices * From Ø 18-78 mm (max) * From Ø 35-78 mm (max)	